



## Yuasa Technical Data Sheet

### Yuasa HJ-S34B20L

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 35Ah |
| Cold Cranking Amps (EN1) | 272A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 197mm |
| Width  | 129mm |
| Height | 227mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 10.5kg |
|-----------------------|--------|



#### Container Features


|                        |             |
|------------------------|-------------|
| Case Type              | B20 JIS AGM |
| Hold Down              | N           |
| End Venting            | ✓           |
| Semi-Traction Features | ✓           |
| Lid Type               | VRLA        |

#### Technology


|                           |                  |
|---------------------------|------------------|
| Flame Arrestor Technology | ✓                |
| Separator                 | Ca/Ca VRLA       |
| Vibration                 | AGM              |
| Recommended Charge Rate   | V1 (30Hz/3g/2hr) |
| Performance Marking       | 2A               |
|                           | W5-C2-V2-E2      |

#### Terminal Type

**T3**  
Small Japanese  
JIS Terminal



#### Cell Assembly Layout

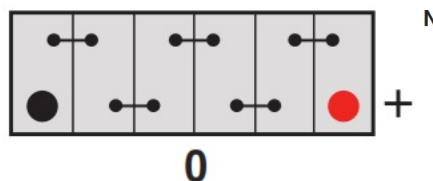

#### Battery Hold-down



Data Sheet generated on 02/02/2023 - E&OE